


DIGITAL THERMOMETERS

Multifunction Digital Thermometer Model Accu-Temp™ E

The Accu-Temp™ E is a versatile thermistor stem probe thermometer with a complete set of functions for applications in a variety of industries. The Accu-Temp™ E has the widest reading range of all our thermistor-based digital thermometers (-58°F to +572°F/-50°C to +300°C) and combines key features such as high and low alarms, a temperature hold button, one-hour auto shutoff, Fahrenheit/Celsius selectable and maximum/minimum memory retention.

Durable and accurate, this digital thermometer also has an easy-to-read LCD and a low battery indicator to make it one of the most user-friendly thermometers available.

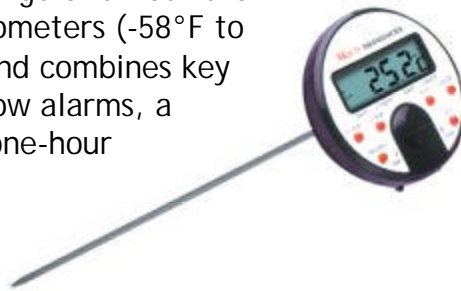

Functions

- High Alarm Button
(Hold until desired setting)
- Low Alarm Button
(Hold until desired setting)
- Max/Min
(scroll Max>Min>Normal)
- °F/°C instant switch
- H/T Hold Function
(Hold flashes when pushed, push to release)

Inquire about Global Sensors calibration maintenance programs. We calibrate what we sell.

**Global Sensors, LLC
79 McAdenville Road
Belmont, NC 28012**

**866.402-8282 (toll free)
704.825.8282
704.825.0191 (FAX)
www.global-sensors.com**

Specifications



Range

-58°F to +572°F (-50°C to +300°C)

Accuracy

±1.8°F (±1.0°C)

Operating Range (Case)

-14°F to +104°F (-50°C to +40°C)

Response Time

1 second in liquid; 12 seconds in air

Display

Easily read LCD; "HOLD/TEST" button for indefinite retention of readings when H/T button is depressed then release to display "Hold" status

Battery Type and Specification

Unit is supplied with a 1.5V button type (G13/A76 size of equivalent). User replaceable. Battery life under normal usage: 2 years.

Sensor Device

Unit is supplied with a fixed stainless steel piercing probe (see Dimensions for detailed information on the standard probe).

Alarm

Audible beeping alarm when low or high settings exceeded

Dimensions

Total Length:

Probe Length: 5.2" (133mm). Stainless steel shaft is reinforced for durability

Probe Diameter: 0.125" (3.2mm)

Enclosure and Case

Waterproof casing of durable ABS plastic. Battery compartment O-ring sealed

Probe Casing:

Protective sheath with pen clip to protect and store the stainless steel probe

Temperature Display

Unit is switchable: °F and °C

Resolution

0.1°F (0.1°C)

Warranty

90 Days

Price

\$22.00 each. Volume discounts are available contact our sales line for a price quote.